

Raised Panel Cutters

3 Wing



Application:

For production of raised profile panels on solid timber doors
Used on spindle moulders or D.E.T machines.
Can be mounted in pairs to give a raised profile on both sides of a panel.

Special Features


Large range of standard profiles.

Available in left and right hand rotation.

This allows production of double sided profile panels.

Inserts are able to be re-sharpened thus reducing costs.

Body supplied in high strength, heat treated aluminum .

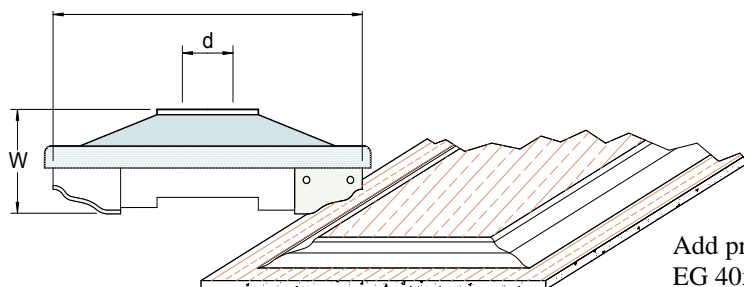

Add profile to end of insert size
EG 40x25x2 P112
Profile No P112

Sizes Available


CODE	D	d	W	Insert
SRP-1504025-1¼	150	31.75	55	40x25x2 P...
SRP-1504025-40	150	40	55	40x25x2 P...
SRP-1804025-1¼	180	31.75	55	40x25x2 P...
SRP-1804025-40	180	40	55	40x25x2 P...

Technical Details:


Aluminum construction.
Balanced design for smooth running.
Bores to H7 tolerance.
Positive insert location.

Spare Parts:

Inserts 40 x 25 x 2-Profiled
Wedge WSPR-4020-T3
Clamp Screw M6 x 15 x7HD
Key 4A/F
Inserts 40x25x2

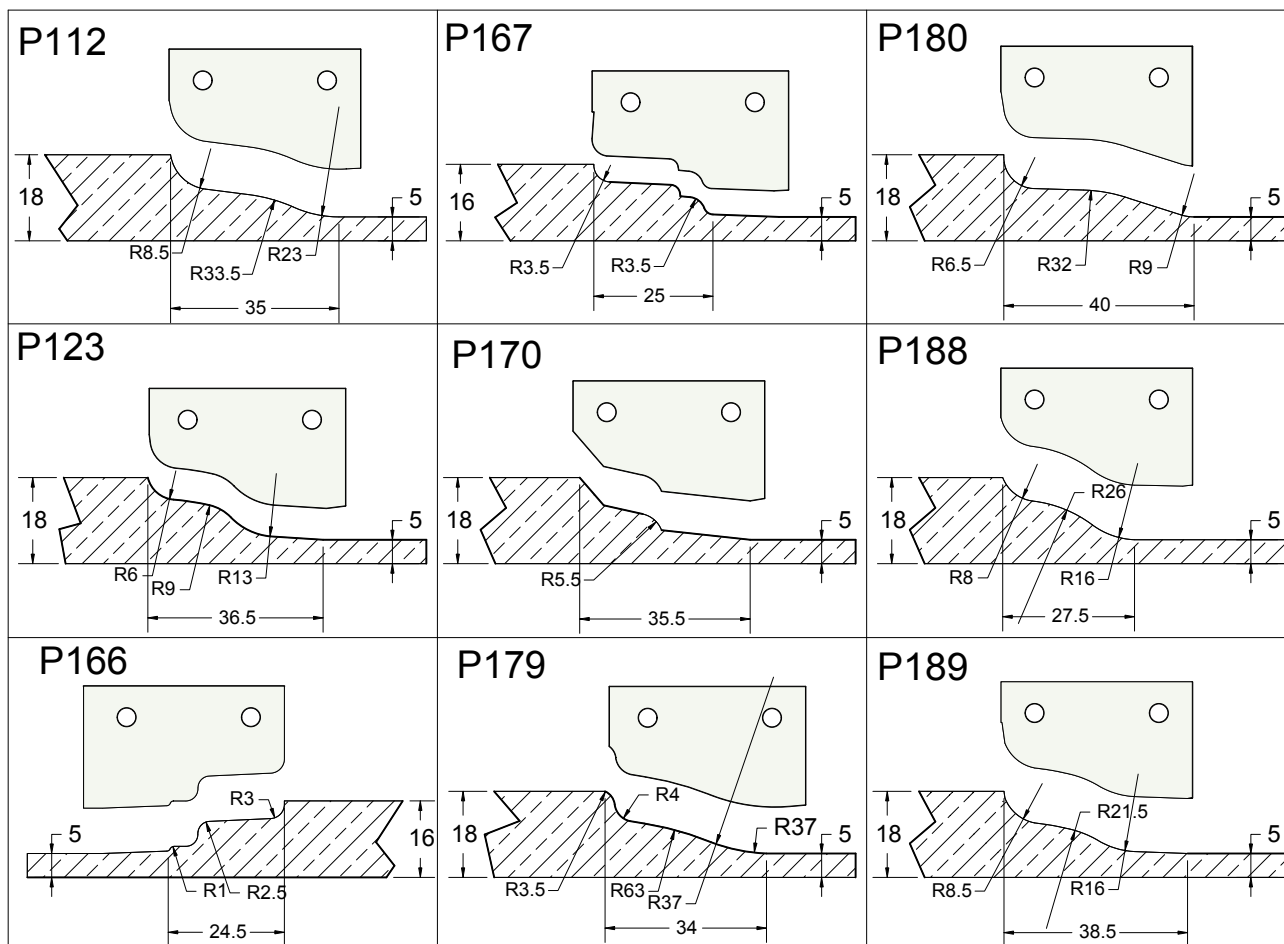

Raised Panel Profiles

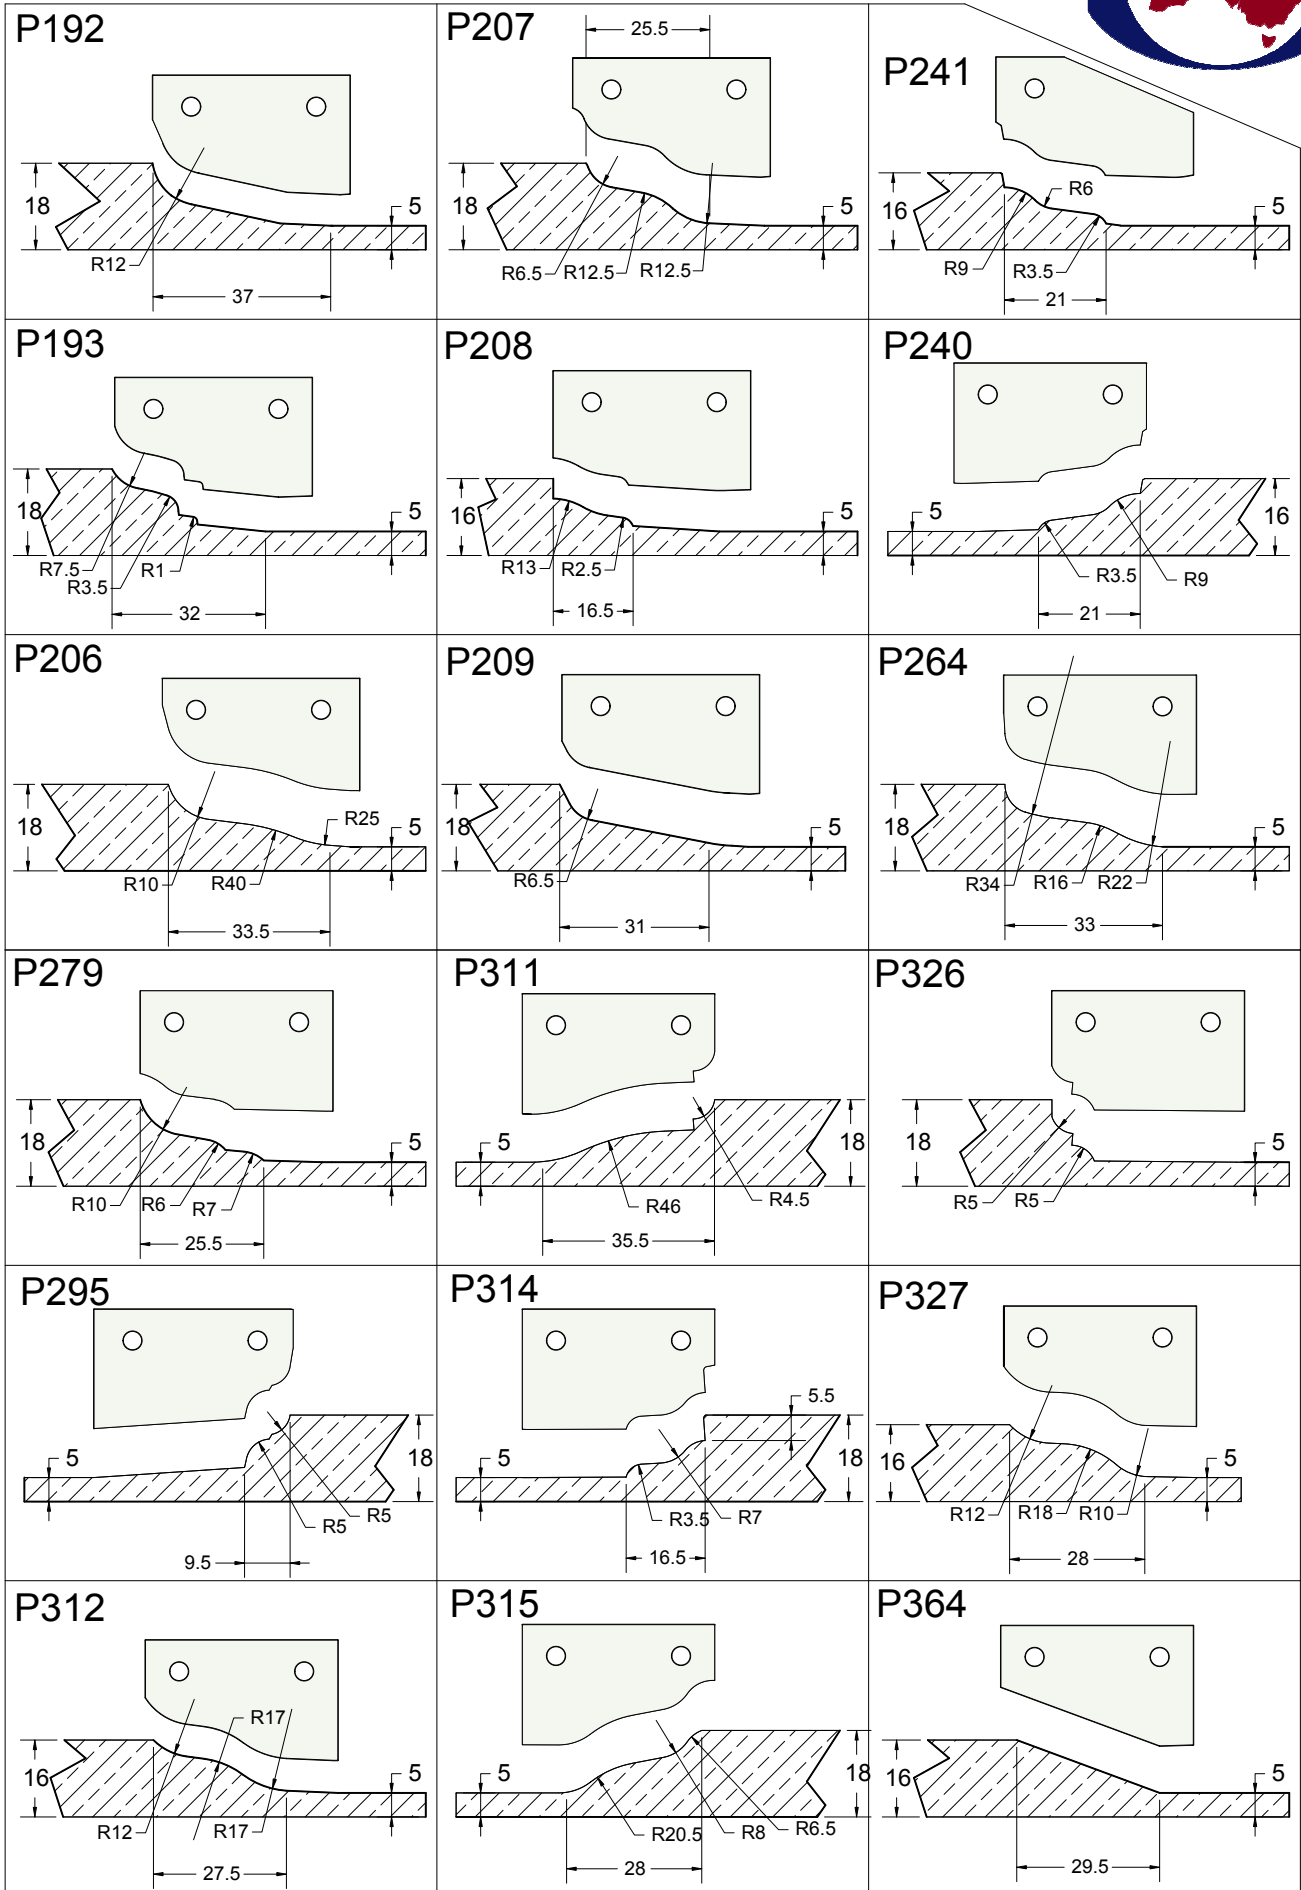

Raised Panel Profiles

